




Dished Only

Specifications

Inside Dish Radius: Typically 100% of diameter
Typical Thin Out Allowance: 1/2" and under – Add .03125" to the minimum
 Over 1/2" – Add .0625" to the minimum

Typically offered as oversized for customer to trim, but trimming of the diameter on the vertical and radial is available upon request.

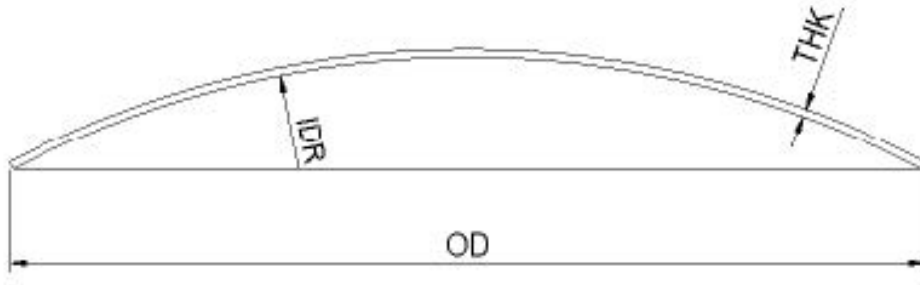

IDR: Inside Dish Radius
THK: Thickness
OD: Outside Diameter

Capabilities

Diameter	3/16"	1/4"	5/16"	3/8"	1/2"	5/8"	3/4"	1"	1-1/4"	1-3/8"	1-1/2"	1-3/4"	2"
12	•	•	•	•									
18	•	•	•	•	•	•	•	•					
24	•	•	•	•	•	•	•	•					
30	•	•	•	•	•	•	•	•					
48	•	•	•	•	•	•	•	•	•	•	•	•	•
60	•	•	•	•	•	•	•	•	•	•	•	•	•
72	•	•	•	•	•	•	•	•	•	•	•	•	•
84	•	•	•	•	•	•	•	•	•	•	•	•	•
96	•	•	•	•	•	•	•	•	•	•	•	•	•
120	•	•	•	•	•	•	•	•	•	•	•	•	•
144	•	•	•	•	•	•	•	•	•	•	•	•	•
156		•	•	•	•	•	•	•	•	•	•	•	•
168		•	•	•	•	•	•	•	•	•	•	•	•
174		•	•	•	•	•	•	•	•	•	•	•	•
192		•	•	•	•	•	•	•	•	•	•	•	•
216			•	•	•	•	•	•	•	•	•	•	•
240			•	•	•	•	•	•	•	•	•	•	•
264			•	•	•	•	•	•	•	•	•	•	•
288			•	•	•	•	•	•	•	•	•	•	•
305			•	•	•	•	•	•	•	•	•	•	•

Heads over 305" can be fabricated as segmented heads. Heads over 1½" on application. Parameters are given as reference only. Please contact a sales representative for specific inquiries. Other sizes and thicknesses, including light gauge jacket heads, are available upon application.