




Shallow Flanged & Dished

Specifications

- Inside Dish Radius:** Any radius over 100% of the diameter
- Inside Knuckle Radius:** Typically 3X the material thickness
- Typical Thin Out Allowance:** 1/2" and under – Add .03125" to the minimum
Over 1/2" – Add .0625" to the minimum

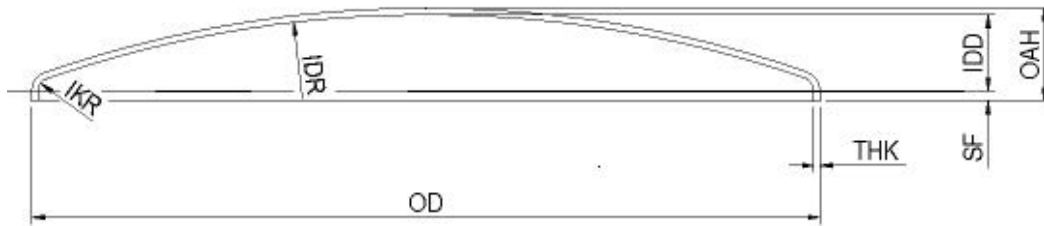

- IKR:** Inside Knuckle Radius
- IDR:** Inside Dish Radius
- THK:** Thickness
- OD:** Outside Diameter
- SF:** Straight Flange
- IDD:** Inside Depth of Dish
- OAH:** Overall Height

Capabilities

Diameter	3/16"	1/4"	5/16"	3/8"	1/2"	5/8"	3/4"	1"	1-1/4"	1-3/8"	1-1/2"	1-3/4"
12	•	•										
18	•	•	•	•	•							
24	•	•	•	•	•							
40	•	•	•	•	•	•						
48	•	•	•	•	•	•	•	•				
60	•	•	•	•	•	•	•	•				
72	•	•	•	•	•	•	•	•				
84	•	•	•	•	•	•	•	•	•	•	•	•
96	•	•	•	•	•	•	•	•	•	•	•	•
108	•	•	•	•	•	•	•	•	•	•	•	•
120	•	•	•	•	•	•	•	•	•	•	•	•
132	•	•	•	•	•	•	•	•	•	•	•	•
144	•	•	•	•	•	•	•	•	•	•	•	•
156		•	•	•	•	•	•	•	•	•	•	•
168		•	•	•	•	•	•	•	•	•	•	•
180		•	•	•	•	•	•	•	•	•	•	•
192		•	•	•	•	•	•	•	•	•	•	
216			•	•	•	•	•	•	•	•	•	
240			•	•	•	•	•	•	•	•	•	
288			•	•	•	•	•	•	•	•	•	

Heads over 288" can be fabricated as segmented heads. Heads over 1½" on application. Parameters are given as reference only. Please contact a sales representative for specific inquiries. Other sizes and thicknesses, including light gauge jacket heads, are available upon application.